

# SHIELD FIREGUARD

## FIRE-RATED FUEL STORAGE TANKS

1,000 - 56,790 LITRES



FUELLING INDUSTRY ON THE MOVE

**FES TANKS**  
FUELEQUIPMENTSPECIALISTS

# SHIELD FIREGUARD TANKS

**FES TANKS**  
FUELEQUIPMENTSPECIALISTS

Compatibility

- D** Diesel
- F** Flammable
- L** Lubricants
- K** Solvents


Distributed by: **GENSET**  
hire and sales australia  
1300 651 391

**From 1,000 to 56,790 litres, if you require fuel or chemical storage on site quickly with added fire protection as standard, SHIELD FIREGUARD is your only option.**

The storage and handling of flammable and combustible liquids (AS 1940:2017) defines minimum separation distances between fuel storage areas with buildings or public areas. SHIELD FIREGUARD fire-rated tanks allow you to greatly reduce these distances and offer a greater range of practical solutions.

**FOR MORE INFORMATION CALL YOUR F.E.S. REPRESENTATIVE.**

SHIELD FIREGUARD tanks are a 4-hour fire rated mobile tank solution for storing a wide range of fuels and chemicals in confined spaces. Our light weight, fully insulated double walled tank systems not only reduces transportation, installation and relocation costs but exceeds the international safety standards for the UL 2-hour fire test.

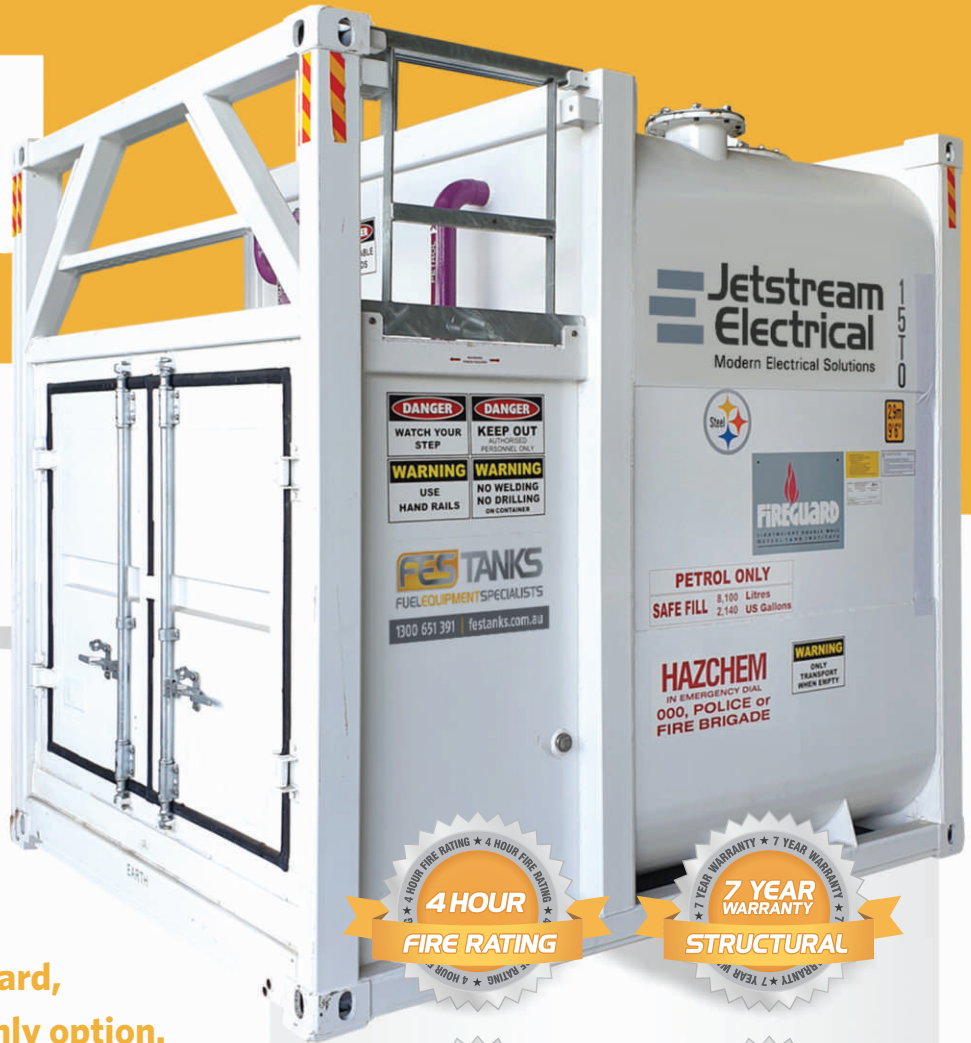

## STANDARD FEATURES

- All units offer a lightweight mobile fuel storage solution.
- Primary storage tank and secondary containment compatible with a wide range of fuels and chemicals.
- Interstitial space can be monitored for leak detection.
- Insulates product in tank from ambient temperature variations, reducing emissions to the environment.
- Meets temperature requirements when the furnace test was extended to 4 hours.
- Larger units based on ISO configurations making them suitable for truck, rail, or shipping transportation.

*\*Conditions apply. Some features standard, some optional extras, depending on product range. Custom colours, coatings, dimensions and refuelling equipment packages are available upon request.*

**STANDARDS Australia**  
✓ AS 1692 ✓ AS 1940

**UL**  
UL142

**UL**  
UL2085

12 Atticus Street, Woree, 4868, QLD  
**1300 651 391 · festanks.com.au**

# SHIELD FIREGUARD SPECIFICATIONS

MODEL	STYLE Tank Type	SFL Litres	CAPACITY Litres	LENGTH mm	WIDTH mm	HEIGHT mm	TARE kg
Shield FRT1	Bloc	1,000	1,053	2,095	1,040	1,550	1,250
Shield FRT2	Bloc	2,000	2,170	2,200	1,667	1,550	1,800
Shield FRT5	Bloc	5,000	5,290	2,720	2,200	1,550	2,665
Shield FRT6	Bloc	6,000	6,324	2,990	2,200	1,960	3,530
Shield FRT8	Bloc	8,000	8,130	4,149	2,200	1,550	4,130
Shield FRT10	Bloc	10,000	10,700	5,223	2,200	1,550	4,715
Shield FGT10	Grande	8,100	8,522	2,991	2,438	2,896	7,750
Shield FGT27	Grande	21,400	22,527	6,058	2,438	2,896	11,275
Shield FGT32	Grande	29,187	30,723	6,058	2,438	2,896	12,750
Shield FGT60	Grande	56,790	59,783	12,192	2,438	2,896	19,350

## \*Fire Rated (Stainless Steel) Aviation/Jet Fuel tanks available upon request\*

The storage of flammable liquids can be accommodated with the relevant venting and accessory change. Remember to check with local authorities. Dimensions are nominal only. Alternative capacities available upon request.

## SHIELD FIREGUARD TANKS INTERNATIONAL SAFETY CERTIFICATION STANDARDS

- UL 2085 Listed 'Protected' tank.
- Ballistics and impact protection per UL 2085 (optional extra).
- Both the inner and outer steel tanks are built to UL standards

\*Conditions apply. Some features standard, some optional extras, depending on product range. Custom colours, coatings, dimensions and refuelling equipment packages are available upon request.



## YOUR LOCAL DISTRIBUTOR:

### Genset Hire and Sales Australia

Tel: (08) 9359 1988 | E-mail: [sales@ghasa.com.au](mailto:sales@ghasa.com.au)  
28 Felspar Street, Welshpool, WA 6106

**FES TANKS**  
FUELEQUIPMENTSPECIALISTS

[E info@festanks.com.au](mailto:info@festanks.com.au) | [T 1300 651 391](tel:1300651391) | [W www.festanks.com.au](http://www.festanks.com.au)

